

No. AJFS1906005225FF

Date: JUN.13, 2019

Page 1 of 5

GLASS LABEL LTD

UNIT E, 6/F, HING YIP CENTER, 31 HING YIP ST, KWUN TONG, KLN

The following sample(s) was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion. results apply to the sample as received.

Sample Name: 5+5MM FABRIC MESH LAMINATED GLASS

SGS Ref No.: HKIND1901053LT

Style/Item No.: /

Test Requested:

BS 476 Part 7:1997 Incorporating Corrigendum No.1:2014 "Fire tests on building materials and structures Part 7: Method of test to determine the classification of the surface spread of flame of products".

Test Results: -- See attached sheet --

Test Period:

Sample Receiving Date

JOMAY 24, 2019 **Test Performing Date**

Signed for and on behalf of SGS-CSTC Co., Ltd. Anji Branch

Allen Zou Lab Manager





No. AJFS1906005225FF

Date: JUN.13, 2019

Page 2 of 5

I. Test conducted

This test was performed in accordance with the procedure specified in BS 476 Part 7:1997 *Incorporating Corrigendum No.1:2014* "Fire tests on building materials and structures Part 7. Method of test to determine the classification of the surface spread of flame of products".

II. Sample details

Description	fabric mesh laminated glass
Thickness	About 10.6mm
Color	Grey
Specimen size	885mm×270mm

III. Test details

Conditioning of specimens:	Prior to testing, the sample was conditioned to constant mass at a temperature of 23 ± 2 °C, and a relative humidity of 50 ± 10 %, and maintained in this condition until required for testing.
Exposed Face:	One surface

Irradiance along horizontal reference line on the calibration board

Distance along reference line from inside edge of specimen holder	Irradiance kW/m²		
mm	Specified	Min.	Max.
75	32.5	32.0	33.0
225	21.0	20.5	21.5
375	14.5	14.0	15.0
525	10.0	9.5	10.5
675	7.0	6.5	7.5
825	5.0	4.5	5.5

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.ngs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents as http://www.ngs.com/en/Terms-and-Conditions.aspx.and, for electronic format document aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document common to expendence except in full, without prior written approval of the Company. Any unauthorized alleration, foregry or falsification of the content or appearance of this document is unleaved and enders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anj County, Zhejiang Province, China 313300 t (多-572) 5018625 f (多-572) 5018629 www.sgsgroup.com.cn 中国・浙江・安吉县阳光工业国二区阳光大道301号 邮编: 313300 t (多-572) 5018625 f (多-572) 5018629 e sgs.china@sgs.com



No. AJFS1906005225FF

Date: JUN.13, 2019

Page 3 of 5

IV. Test results

SPECIMEN No.	1	2	3	4	5	6
Distance (mm)	Time to travel to indicated distance (minutes :seconds)					
75						
165						
190						
215						
240				<i>\</i> -\		
265				<u></u>		
290				-		
375	-	1	1	-		-
455			4			
500			0 20 N			
525		- 8				
600			: OV			
675		> OU				
710	(^					
750		110 ¹⁰				
785	\\\ \'	VY				
825						
Maximum distance traveled at 1.5 minutes (mm)	<50	<50	<50	<50	<50	<50
Maximum distance traveled during the whole test (rnm)	<50	<50	<50	<50	<50	<50
Time to reach maximum distance traveled	1min	1min	1min	1min	1min	1min

Note: 1. "--" Not reached the reference line

2. Six specimens are usually tested. If the test on any specimen is deemed to be invalid, as defined in the standard, it is permissible for up to a maximum of nine specimens to be tested in order to obtain the six valid test results.

The classification limits specified in BS 476 Part 7:1997 *Incorporating Corrigendum No.1:2014* are given in Appendix 1.

Observations during test: None

To be continued....





No. AJFS1906005225FF

Date: JUN.13, 2019

Page 4 of 5

Criteria for classification:

If the prefix "D" or suffix "R" or "Y" is included in the classification, this indicates that the results should be treated with caution. An explanation of the reason for prefix and suffixes is given in Appendix 2.

Appendix 1 Classification of spread of flame

	Spread	of flame at 1.5 min	Final spread of flame		
Classification	Limit (mm)	Limit for one specimen in sample(mm)	Limit (mm)	Limit for one specimen in sample(mm)	
Class 1	165	165+25	165	165+25	
Class 2	215	215+25	455	455+45	
Class 3	265	265+25	710	710+75	
Class 4	Exceeding the limits for class 3				

Appendix 2 Explanation of prefix and suffixes which may be added to the classification

- 1. A suffix R is added to the classification if more than six specimens are required in order to obtain six valid test results (e.g. class 2R).
- 2. A prefix D is added to the classification of any product which does not conform to the surface characteristics specified in the standard and has therefore been tested in a modified form (e.g. class D3).
- 3. A suffix Y shall be added to the classification if any softening and/or other behaviour that may affect the flame spread occurs.

<u>Classification</u>: In accordance with the class definitions given in BS 476 Part 7:1997 *Incorporating Corrigendum No.1:2014*, the tested sample is classified as <u>Class 1</u>.

Statements:

This declaration of **conformity** is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test. They are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

The test results relate only to the specimens of the product in the form in which were tested. Small differences in the composition or thickness of the product may significantly affect the performance during the test and may therefore invalidate the test results. Care should be taken to ensure that any product, which is supplied or used, is fully represented by the specimens, which were tested.

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alleration forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the eaults shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention To check the authenticity of testing / inspection reports a certificate, please contact us at telephone:(#6-755) 8307




No. AJFS1906005225FF


Date: JUN.13, 2019

Page 5 of 5

Photo Appendix:

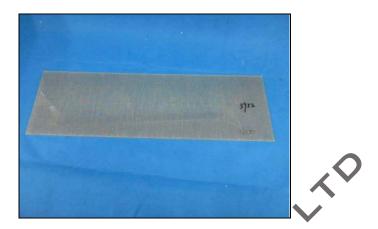

SGS authenticate the photo on original report only

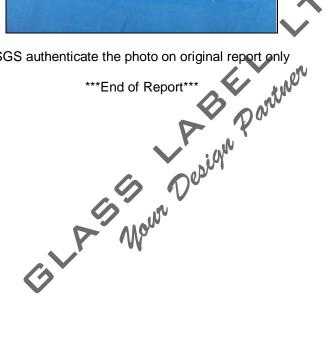





No. 301, Sunlight Road, 2 Blook, Sunlight Industry Zone, Anj County, Zhejang Province, China 313300 t (多行2) 501885 f (多行2) 501885 www.sgsgroup.com.cn 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编:313300 t (多行2) 501885 f (多行2) 501889 e sgs.china@sgs.com